
This is a fixed installation all connections should be carried out by a competent person.

The control switch must be installed for maintenance reasons.

All cables supplied at 2m, extendable to 10m with appropriate cable.



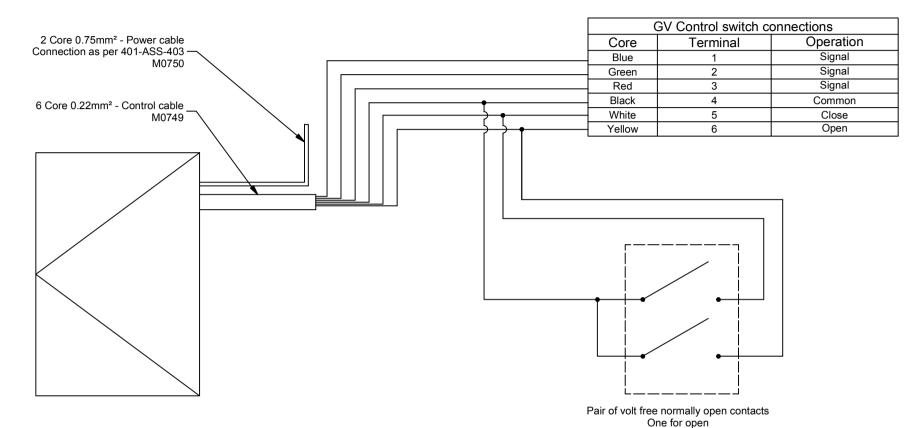

## One touch / Press and hold

Caution: Using latched contacts may render the rooflight inoperable. To initiate a control cycle e.g. to open, close or stop the rooflight, switch the contact briefly (approx. 500ms) to create one touch command.

Please call Glazing Vision if you need assistance.

\*\*Cables exit from the underside refer to kerb drawing 401-ASS-401 for detailed exit position

All optional items must be specified at time of order



Saw Mills Road Diss Norfolk IP22 4RG

Tel: +44 (0)333 8000 881

IT IS GLAZING VISION'S POLICY TO CONTINUOUSLY DEVELOP AND IMPROVE OUR PRODUCTS. WE THEREFORE RESERVE THE RIGHT TO MODIFY OR CHANGE THE DETAIL DESIGN AT OUR DISCRETION AND WITHOUT PRIOR NOTICE. THIS DRAWING IS COPYRIGHT AND THE SOLE PROPERTY OF GLAZING VISION LTD. THE DESIGNS/INFORMATION IT CONTAINS ARE PRIVATE AND CONFIDENTIAL. IT MUST NOT BE Fax: +44 (0)333 8000 881 COPIED, EXHIBITED OR COMMUNICATED TO THIRD PARTIES FOR ANY PURPOSE OTHER THAN THAT FOR Email: sales@glazingvision.co.uk | PARTIES FOR ARTHOUGH SECTION AND THE WRITTEN Website: www.glazingvision.co.uk | PERMISSION OF GLAZING VISION LTD.

	Third angle projection unless otherwise noted.				
	Tolerances:				
Whole numbers = ±1mm					
	One decimal place = ±0.5mm				
IS	Two decimal places = ±0.2mm				
	All angles 90±0.5 degrees unless specified				
	IF IN DOUBT - ASK! DO NOT SCALE				
	Supplier to deburr & remove sharp corners				

Rev	Revision Description	Drawn/ Date	Product: 407 - GV Standard Skyhatch		Checked By:
	Initial release	SW	<b>Description:</b> Secondary control switch or BMS wiring diagram		sc
-		28.11.16	Materials: N/A		Check Date:
			Finish: N/A	Drawn By: SW	28.11.16
			Weight:	Drawn Date: 28.11.16	20.11.10
			Quantity: N/A		012
			Scale: N/A	Drawing No: 407-ASS	-013

One for close